


--	Standard					--
Size	D	Tolerance	t (min)	Tolerance	D1	
1/2"	21.34	±0.10	2.77	+0.51	15.76	
3/4"	26.67	±0.10	2.87	+0.51	20.96	
1"	33.40	±0.13	3.38	+0.51	26.64	
1-1/4"	42.16	±0.15	3.56	+0.51	35.08	
1-1/2"	48.26	±0.15	3.68	+0.51	40.94	
2"	60.33	±0.15	3.91	+0.51	52.48	
2-1/2"	73.03	±0.18	5.16	+0.61	62.68	
3"	88.90	±0.20	5.49	+0.66	77.92	
4"	114.30	±0.23	6.02	+0.71	102.26	
5"	141.30	±0.25	6.55	+0.79	128.20	
6"	168.28	±0.28	7.11	+0.86	154.08	
8"	219.08	±0.38	8.18	+0.99	202.74	
10"	273.05	±0.38	9.27	+1.12	254.51	
12"	323.85	±0.38	10.31	+1.24	303.23	
14"	355.60	±0.38	11.10	+1.35	333.40	
16"	323.85	±0.48	12.70	+1.52	381.00	

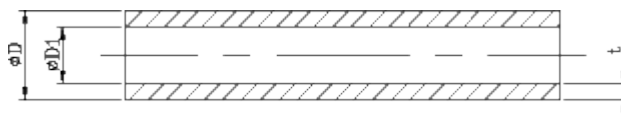

SCH. 80	Standard				
Size	D	Tolerance	t (min)	Tolerance	D1
1/2"	21.34	±0.10	3.73	+0.51	13.84
3/4"	26.67	±0.10	3.91	+0.51	18.88
1"	33.40	±0.13	4.55	+0.53	24.30
1-1/4"	42.16	±0.13	4.85	+0.58	32.50
1-1/2"	48.26	±0.15	5.08	+0.61	38.14
2"	60.33	±0.15	5.54	+0.66	49.22
2-1/2"	73.03	±0.18	7.01	+0.84	58.98
3"	88.90	±0.20	7.62	+0.91	73.66
4"	114.30	±0.23	8.56	+1.02	97.18
6"	168.28	±0.28	10.97	+1.32	146.34
8"	219.08	±0.38	12.70	+1.52	193.68
10"	273.05	±0.38	15.06	+1.80	242.98
12"	323.85	±0.38	17.45	+2.08	289.00
14"	355.60	±0.38	19.05	+2.29	317.50
16"	406.40	±0.40	21.41	+2.57	363.58

## RURY SDR 13.5

Size	D	Tolerance	t (mm)	Tolerance	D1
1/2"	21.34	±0.10	1.57	+0.51	18.16
3/4"	26.67	±0.10	1.98	+0.51	22.74
1"	33.4	±0.13	2.46	+0.51	28.48
1-1/4"	42.16	±0.13	3.12	+0.51	35.96
1-1/2"	48.26	±0.15	3.58	+0.51	41.04
2"	60.33	±0.15	4.47	+0.53	51.36
2-1/2"	73.03	±0.18	5.41	+0.66	62.18
3"	88.9	±0.20	6.58	+0.79	75.74
4"	114.3	±0.23	8.46	+1.02	97.38
6"	168.28	±0.28	12.47	+1.50	143.36
8"	219.08	±0.38	16.23	+1.95	186.64